


# Networking

## Etherstretch Pro™ Network Extenders Multi-Channel Receiver IP Coax Series

### Features

- Transmits IP data & PoE up to distances of 500 meters (1,640 ft)
- Rack mounted multi-channel (8) Etherstretch solution
- Includes a built-in power source for all connected devices
- Gigabit output network connectivity
- Supports 10/100 and PoE over coax cable
- Supports mega-pixel technology
- SFP ports support Fiber interfacing
- NEXTT provides remote monitoring
- Easy to install, no set up required
- LED indicators for network signals, link status and power
- Short circuit, over current and over voltage protection
- Supports IEEE802.3af and IEEE802.3at
- Made in the U.S.A.

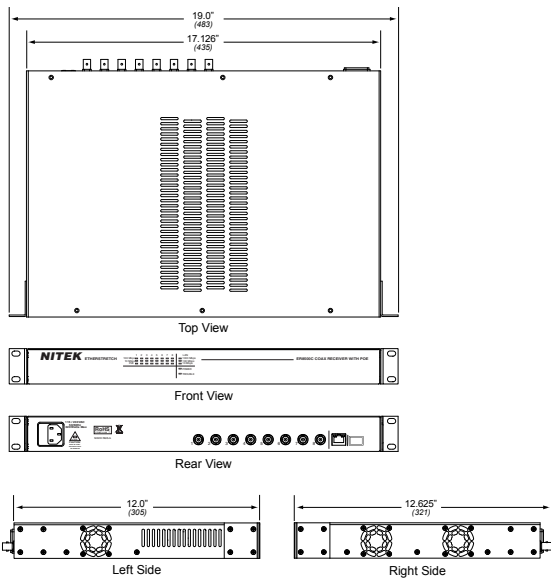

**Dekom Video Security & Network GmbH**  
Hoheluftchaussee 108  
D-20253 Hamburg  
Germany  
00 49 (0)40 47 11 213-0  
info@dekom-security.de  
www.dekom-security.de

11.2017



IEC/UL 60950-1



**Nitek Europe BV**  
De Aar 99  
8253 PN Dronten  
The Netherlands  
00 31(0) 321 310 043  
info@nitekeurope.net  
www.nitek.net

Patent Pending USA  
Euro Pat App 2779641



## Technical Specifications

<b>Network Port:</b>	1 RJ45 Connector, 1 Gigabit
<b>SFP Port:</b>	1 SFP port, 1 Gigabit
<b>Link Port:</b>	8 BNC Connectors
<b>LED Indicators:</b>	Link Status, Power, PoE Out, 10/100/1000Mb
<b>PoE Capabilities:</b>	Compliant w/ IEEE 802.3af & IEEE 802.3at Standards
<b>Operating Temperature:</b>	0° to 52° C / 32° to 125° F
<b>Humidity:</b>	Up to 95% non-condensing
<b>Power Requirements:</b>	IEC380 connector - 110-240VAC/50-60Hz/320Watt
<b>Power:</b>	250 watts Internal
<b>BTU rating:</b>	150 Btu/h
<b>Dimensions:</b>	1 RU x 12.0"D
<b>Mounting:</b>	Standard rack mounting
<b>Shipping Dimensions:</b>	18"W x 24"H x 8.5"D
<b>Shipping Weight:</b>	12 lbs

## Common Installation

